

PEER ISO British Standard Metric Chains & Attachments


SOLID ROLLERS



Ideal Replacement Chain
for Imported/OEM Equipment



S I N G L E & M U L T I P L E S T R A N D S

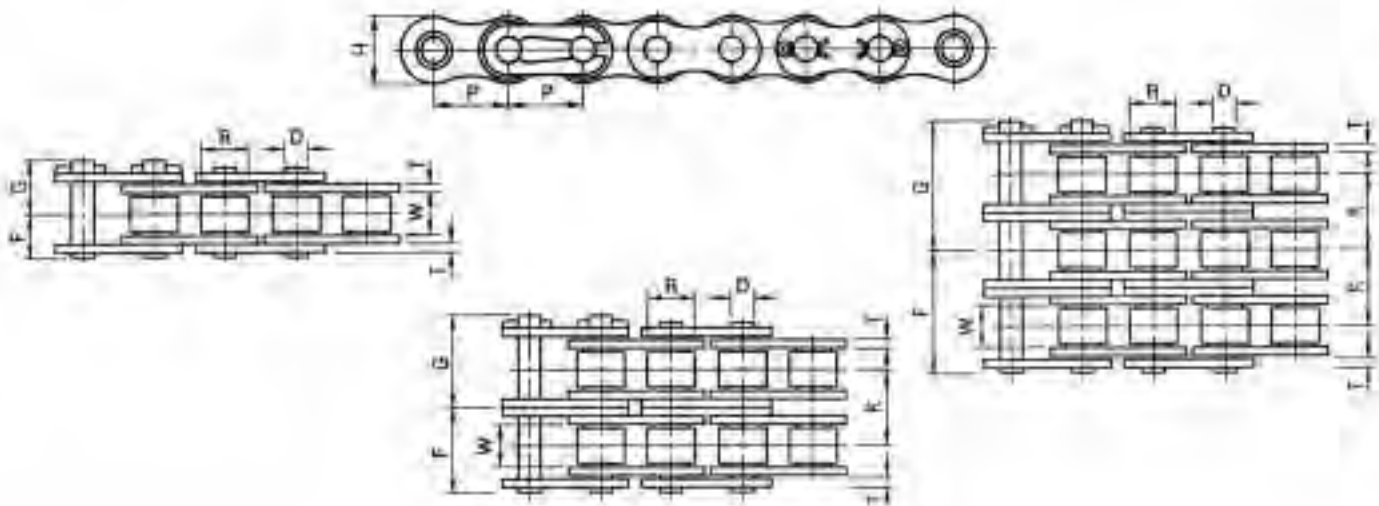

British Standard Chains

Dimensions: *Inch*


Peer Chain No.	Pitch P	Width W	Roller Diam. R	Height H	Plate Thickness		Pin Diam. D	Overall Width		Transverse Pitch K	Average Ultimate Strength Lbs.	Average Weight Per Foot Lbs.
					T1	T2		F	G			
04B	0.236	0.110	0.157	0.196	0.023	0.023	0.072	0.129	0.161	—	720	0.08
05B	0.315	0.118	0.196	0.265	0.031	0.031	0.090	0.153	0.181	—	1,140	0.11
083	0.500	0.192	0.305	0.450	0.049	0.049	0.161	0.244	0.279	—	3,300	0.30
06B-1	0.375	0.225	0.250	0.325	0.049	0.049	0.129	0.255	0.283	—	2,300	0.30
06B-2	0.375	0.225	0.250	0.325	0.049	0.049	0.129	0.449	0.488	0.403	4,300	0.52
06B-3	0.375	0.225	0.250	0.325	0.049	0.049	0.129	0.657	0.697	0.806	6,610	0.85
08B-1	0.500	0.305	0.335	0.462	0.059	0.059	0.175	0.318	0.358	—	4,070	0.45
08B-2	0.500	0.305	0.335	0.462	0.059	0.059	0.175	0.598	0.661	0.548	8,150	0.90
08B-3	0.500	0.305	0.335	0.462	0.059	0.059	0.175	0.886	0.949	1.096	12,120	1.35
10B-1	0.625	0.379	0.400	0.578	0.064	0.064	0.200	0.381	0.417	—	5,620	0.65
10B-2	0.625	0.379	0.400	0.578	0.064	0.064	0.200	0.713	0.772	0.653	11,240	1.30
10B-3	0.625	0.379	0.400	0.578	0.064	0.064	0.200	1.043	1.102	1.306	16,750	1.90
12B-1	0.750	0.459	0.475	0.635	0.070	0.070	0.225	0.437	0.480	—	7,380	0.87
12B-2	0.750	0.459	0.475	0.635	0.070	0.070	0.225	0.823	0.874	0.766	14,760	1.75
12B-3	0.750	0.459	0.475	0.635	0.070	0.070	0.225	1.224	1.260	1.532	22,040	2.60
16B-1	1.000	0.670	0.625	0.814	0.124	0.156	0.325	0.692	0.775	—	16,310	1.81
16B-2	1.000	0.670	0.625	0.814	0.124	0.156	0.325	1.319	1.409	1.255	32,620	3.60
16B-3	1.000	0.670	0.625	0.814	0.124	0.156	0.325	1.960	2.050	2.510	49,600	5.30
20B-1	1.250	0.770	0.750	1.026	0.124	0.173	0.401	0.780	0.961	—	20,060	2.45
20B-2	1.250	0.770	0.750	1.026	0.124	0.173	0.401	1.520	1.654	1.435	40,100	4.90
20B-3	1.250	0.770	0.750	1.026	0.124	0.173	0.401	2.217	2.400	2.870	60,170	7.30
24B-1	1.500	1.000	1.000	1.315	0.188	0.219	0.575	1.060	1.255	—	33,060	4.90
24B-2	1.500	1.000	1.000	1.315	0.188	0.219	0.575	1.988	2.218	1.903	66,120	9.80
32B-1	2.000	1.220	1.150	1.661	0.236	0.275	0.702	1.326	1.554	—	57,100	6.80
32B-2	2.000	1.220	1.150	1.661	0.236	0.275	0.702	2.480	2.696	2.305	114,220	13.65

NOTE: Chain available in Nickel Plated and Stainless Steel.

T1 = Pin Link (Outside) Plate

T2 = Roller Link (Inside) Plate


STRANDS WITH ATTACHMENTS

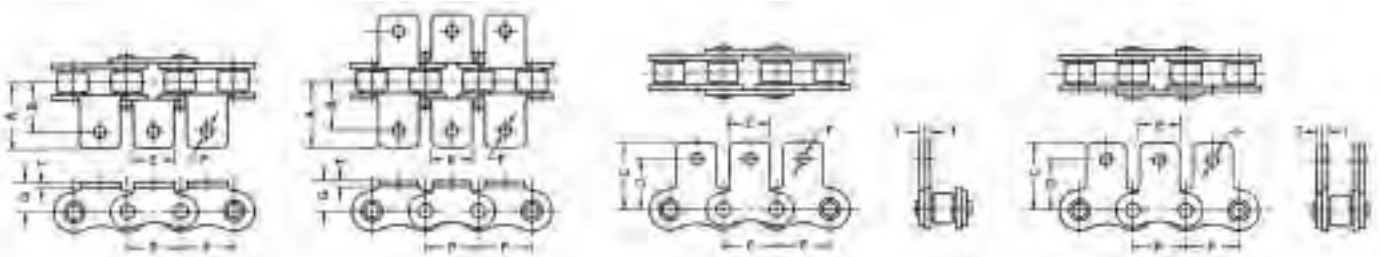

A-1 / K-1 / SA-1 / SK-1 Attachments

Dimensions: *Inch*

Peer Chain No.	Pitch P	A	B	C	D	E	F	G	T
06B	0.375	0.531	0.375	0.531	0.769	0.315	0.138	0.256	0.049
08B	0.500	0.717	0.500	0.744	0.525	0.433	0.169	0.350	0.059
10B	0.625	0.878	0.625	0.904	0.650	0.562	0.209	0.406	0.064
12B	0.750	1.031	0.750	1.125	0.844	0.625	0.252	0.530	0.070
16B	1.000	1.429	1.000	1.339	0.911	0.750	0.252	0.625	0.124

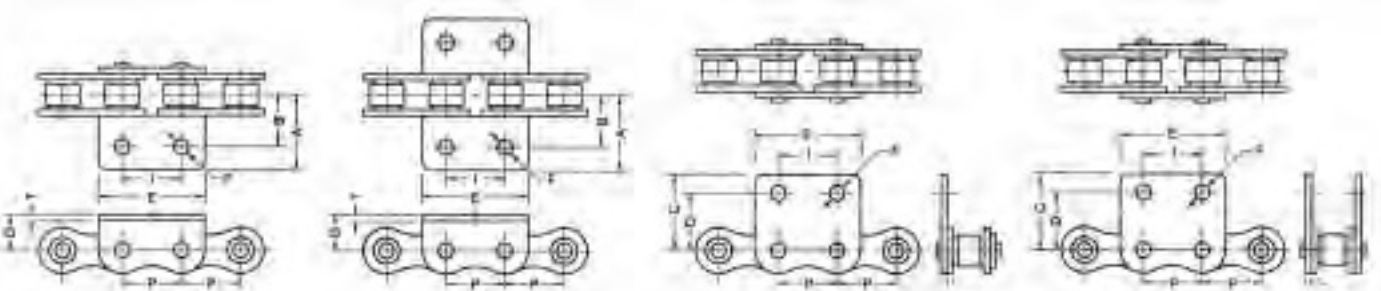

WA-2 / WK-2 / WSA-2 / WSK-2 Attachments

Dimensions: *Inch*

Peer Chain No.	Pitch P	A	B	C	D	E	F	G	T	I
08B	0.500	0.717	0.500	0.744	0.526	0.963	0.169	0.350	0.059	0.500
10B	0.625	0.878	0.625	0.903	0.650	1.204	0.209	0.406	0.064	0.625
12B	0.750	1.031	0.750	1.126	0.844	1.385	0.252	0.530	0.070	0.750
16B	1.000	1.429	1.000	1.339	0.914	1.815	0.252	0.625	0.124	1.000

CALL US TODAY!

Your One-Stop Source for Virtually Any Type of British Standard Chain

- One of the Largest ISO, Metric Chain Inventories in the U.S.
- Available in Nickel Plated and Stainless Steel. Also Available as Quest[™] Chain.
- Ideal Replacement for Imported Equipment or OEM Chains Required for Machinery Produced for Export
- All Chains Manufactured to International Organization for Standardization (ISO) and Din Standards. DIN 8180/8187
- Single, Double and Triple Strand Chains
- Solid Rollers / Hardened Parts with Hot Dip Lubrication
- Custom and Short Notice Requests Welcome

DISTRIBUTED BY:

